



MANUAL TILTER 1500

Designed to fit between tight, vertical storage racks, these Powr-Grip[®] vacuum lifters can handle stone and other high-density materials with rough surfaces or irregular shapes.

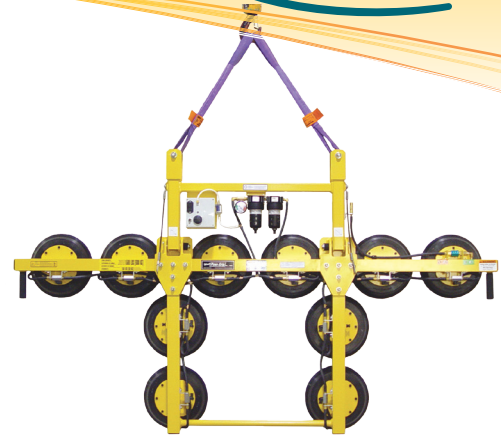

Standard Pad Spread	33 ³ / ₄ " x 77 ³ / ₄ " [85 x 197 cm]
Number / Size of Pads	10 / 10" [25 cm] diameter vacuum pads with replaceable foam rings
Maximum Load Capacity	1500 lbs [680 kg]
Lifter Weight (without power system)	125 lbs [57 kg]
Load Movement	Manual tilt, 90° between upright and flat
Standard Features	Individual shutoffs to all pads Closed cell foam pad rings Spring-mounted pads Vacuum gauge Vacuum line filter Nylon slings
Available Options	Pad shutoffs kit with individual gauges (special order) Vacuum loss warning buzzer (93780AM) Flat lift adapter (95902) Center spool lift bar (58461AM) Center spool lift bar bolt-on adapter (95906) Vacuum package mounting bar (95904) Alternative pad compounds, including ones for low-marking, temperature resistant and coated surface applications (special order) Alternative pad frame configurations and capacities (special order)
Available Power Systems	DC Power System (MT1010TDC) Air (Venturi) Power System (MT1010TAIR) AC Power System (MT1010TAC) 120 volts, 50/60 hertz, 6 amps (240 volts, 50/60 hertz, 3 amps also available)
Design Standards: (See WPG.com for more information.)	ASME B30.20 (BTH-1 Design Category "B", Service Class "0")

MT1010T
1500 lbs [680 kg]

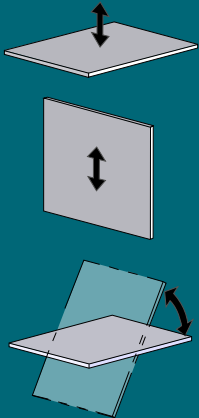

**THE ORIGINAL
 & TRUSTED NAME
 IN VACUUM LIFTING
 EQUIPMENT**

908 West Main - P.O. Box 368
 Laurel, Montana 59044 U.S.A.
 406.628.8231 (phone)
 406.628.8354 (fax)

800.548.7341
www.WPG.com

