

# WOOD'S POWR-GRIP® C-FRAME/MANUAL ROTATORS 500 & 750





## CFMR411LACS


700 lbs [320 kg]

## CFMR49ACS

500 lbs [225 kg]



These Powr-Grip® vacuum lifters feature continuous 360° rotation and a unique design for moving materials into and out of upright cases.

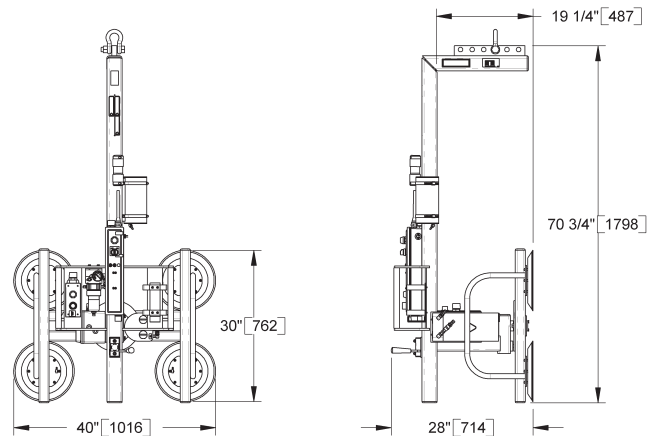

	CFMR411LACS	CFMR49ACS
<b>Maximum Load Capacity</b>	<b>700 lbs [320 kg]</b>	<b>500 lbs [225 kg]</b>
<b>Standard Operating Power</b>	120 volts AC, 50/60 hertz, 5 amps (Other voltages available)	
<b>Load Movement</b>	Manual rotation, 360° edgewise with locking at each quarter point.	
<b>Standard Features</b>	Multi-position lift shackle Green lift light Vacuum gauge Vacuum reserve tank Vacuum line filter Spring-mounted vacuum pads Industrial grade switches Twist-lock electrical plug Blow-off for quick release	
<b>Available Options</b>	Movable control pendant (special order) Vacuum loss warning buzzer (93780AM) 12-Volt/DC vacuum back-up system Individual pad shutoffs (93011) Voltage adaptation (special order) Adjustable vertical handles (special order)	
<b>Alternative Power Systems</b>	DC power system (CFMR411LDCS or CFMR49DCS) Air (venturi) power system (CFMR411LAIRS or CFMR49AIRS)	
<b>Standard Throat Depth</b>	19 1/4" [487 mm]	
<b>Attach</b>	3 seconds (approximately)	2 seconds (approximately)
<b>Release</b>	2 seconds (approximately)	1 second (approximately)
<b>Standard Pad Spread</b>	30" x 40" [762 x 1016 mm]	27" x 37" [686 x 940 mm]
<b>Number / Size of Pads</b>	4 / 11" [28 cm] dia. lipped	4 / 9" [23 cm] diameter
<b>Design Standards</b>	ASME B30.20 (BTH-1 Design Category "B", Service Class "0") (See www.WPG.com for more information.)	



**THE ORIGINAL  
& TRUSTED NAME  
IN VACUUM LIFTING  
EQUIPMENT**

**800.548.7341  
WPG.com**

908 West Main - P.O. Box 368  
Laurel, Montana 59044 U.S.A.  
406.628.8231 (phone)  
406.628.8354 (fax)

Wood's Powr-Grip products are sold through authorized dealers.

Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.