

WOOD'S POWR-GRIP[®] MANUAL ROTATORS 500 & 700





MR49AC

500 lbs [225 kg]

MR411LAC

700 lbs [320 kg]

With continuous 360° rotation, these Powr-Grip[®] vacuum lifters supply an efficient and economical way to feed vertically oriented processing machinery.

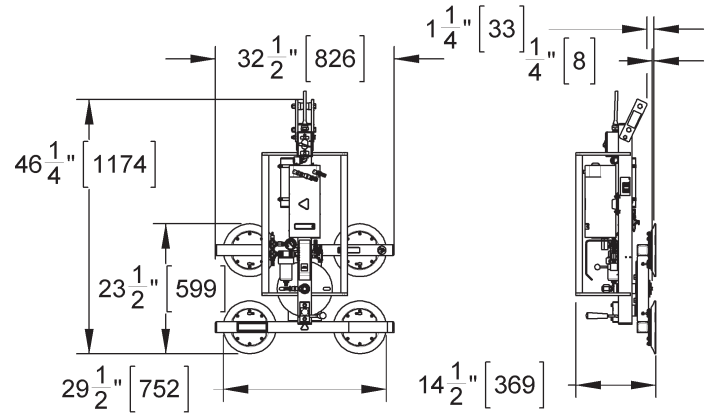

**THE ORIGINAL
& TRUSTED NAME
IN VACUUM LIFTING
EQUIPMENT**

**800.548.7341
WPG.com**

908 West Main - P.O. Box 368
Laurel, Montana 59044 U.S.A.
406.628.8231 (phone)
406.628.8354 (fax)

	MR49AC	MR411LAC
Maximum Load Capacity	500 lbs [225 kg]	700 lbs [320 kg]
Standard Operating Power	120 volts AC, 60 hertz, 5 amps	
Load Movement	Manual rotation, 360° edgewise with locking at each 1/4 turn	
Standard Features	Adjustable-position lift spool Vacuum gauge Vacuum reserve tank Vacuum line filter Spring-mounted pads Twist-lock electrical plug Blow-off for quick release	
Available Options	Individual pad shutoffs (93011) Pad shutoffs kit with individual gauges (special order) Green lift light Vacuum loss warning buzzer (93780AM) Voltage adaptation (special order) Linear pad frame (57952) Adjustable vertical handles (special order) 10" [25 cm] diameter, lipped vacuum pads (HV11) (Specifications not as listed above. Please contact us for more information.) Alternative pad compounds for low-marking, temperature resistant and coated surface applications (special order) Alternative pad frame dimensions and configurations (special order)	
Lifter Weight	92 lbs [42 kg]	
Attach	2 seconds (approximately)	3 seconds (approximately)
Release	1 second (approximately)	2 seconds (approximately)
Standard Pad Spread	23½" x 29½" [599 mm x 752 mm]	26" x 32" [661 mm x 813 mm]
Number / Size of Pads	4 / 9" [23 cm] diameter	4 / 11" [28 cm] dia. lipped
Design Standards	ASME B30.20 (BTH-1 Design Category "B", Service Class "0") (See www.WPG.com for more information.)	

Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.