



POWER TILTER 1200

With powered 90° tilt and a frame that supplies support across the entire load surface, this Powr-Grip® vacuum lifter is ideal for handling oversized production materials.

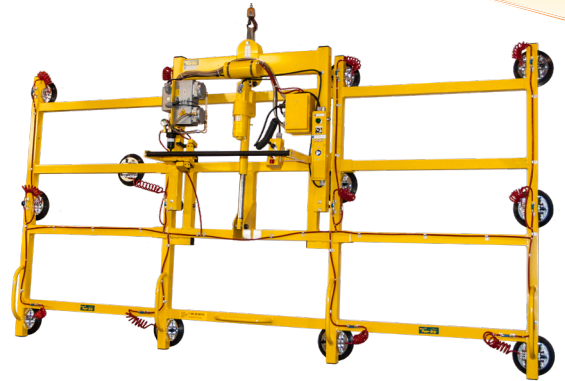

PT129ACS

1200 lbs [545 kg]

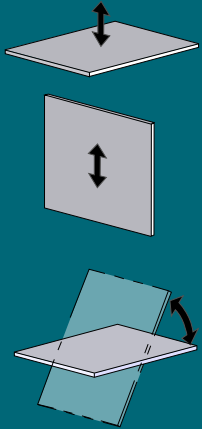

**THE ORIGINAL
 & TRUSTED NAME
 IN VACUUM LIFTING
 EQUIPMENT**

908 West Main - P.O. Box 368
 Laurel, Montana 59044 U.S.A.
 406.628.8231 (phone)
 406.628.8354 (fax)

**800.548.7341
 www.WPG.com**

Standard Pad Spread	77½" x 153½" [1969 x 3899 mm]
Number / Size of Pads	12 / 9" [23 cm] diameter
Load Capacity	1200 lbs [545 kg]
Unit Weight	482 lbs [219 kg]
Standard Operating Power	120 volts AC, 60 hertz, 12 amps
Apply	6 seconds (approximately)
Release	5 seconds (approximately)
Load Movement	Power tilt, 90° between upright and flat
Time for 90° Tilt	12 seconds (approximately)
Tilt Duty	27 tilts per hour
Standard Features	Green lift light Movable control pendant Vacuum gauge Vacuum reserve tank Vacuum line filter Spring-mounted pads Twist-lock electrical plug Blow-off for quick release
Available Options	Voltage adaptation (EO6VA) Vacuum loss warning buzzer (EO3VLW) High-duty tilt with speed control (LB1ETO) 12-Volt/DC vacuum back-up system (EO1DCB) Individual pad shutoffs (CM1COWB) Movable pad mounts (CM2SCM) Alternative frame dimensions and configurations
Design Standards: (See www.WPG.com for more information.)	ASME B30.20 - 2006 (BTH-1 Design Category "B", Service Class "0")

