




WOOD'S POWR-GRIP® QUADRA-TILT 360 (8 PADS)



MTA8LP6FAC
360 lbs [165 kg]

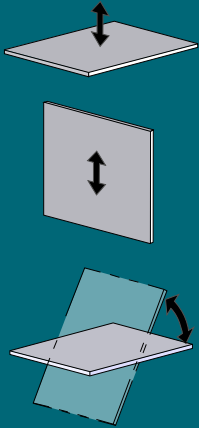

Holes and defects in the load can easily be avoided by repositioning the vacuum pads on this Powr-Grip® vacuum lifter with our innovative Quadra-Tilt linkage.

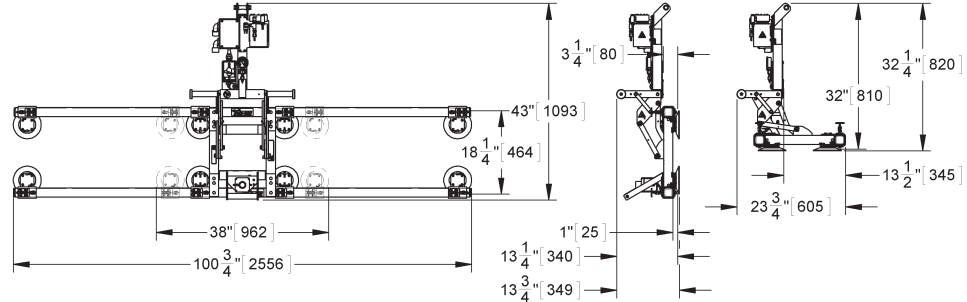

The Quadra-Tilt Lifters feature an innovative four-bar tilt mechanism that significantly reduces the effort of tilting loads between flat and upright positions. This tilt mechanism also reduces hazards associated with lifting loads from upright racks: When a load is tilted to either the upright or the flat position, the lifter maintains the load position automatically without using latches, eliminating the tendency for a load to “kick back” at the operator’s knees.

The MTA8LP6FAC also features sliding adjustable pads (illustrated below) that accommodate a variety of load sizes and shapes. Holes or defects in the load surface are easily avoided because vacuum pads can attach at any number of locations on the load.

Maximum Load Capacity	360 lbs [165 kg]
Load Movement	Assisted manual tilt, 90° between upright and flat
Standard Features	Vacuum gauge Vacuum line filter Sliding adjustable pad mounts Spring-mounted pads Twist-lock electrical plug Multiple handles for easy load positioning Blow-off for quick release
Available Options	Vacuum loss warning buzzer (93780AM) Individual pad shutoffs (93011) 2" [5 cm] pad spacers (97461) Voltage adaptation (special order) Alternative frame dimensions and capacities
Standard Operating Power	120 volts AC, 60 hertz, 3 amps (240 volts AC, 50/60 hertz, 2 amps also available)
Alternative Power Systems	DC power system (MTA8LP6FDSCS) Air (venturi) power system (MTA8LP6FAIR) (Specifications may not be as listed above. Please contact us for more information.)
Adjustable Pad Spread	Length: Min: 38" [962 mm], Max: 100¾" [2556 mm] Width: Min: 18¼" [464 mm], Max: 29" [737 mm]
Number / Size of Pads	8 / 6" [15 cm] diameter
Lifter Weight	125 lbs [57 kg]
Apply	2 seconds (approximately)
Release	2 seconds (approximately)
Design Standards	ASME B30.20 (BTH-1 Design Category "B", Service Class "0") (See www.WPG.com for more information.)

Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.



**THE ORIGINAL
& TRUSTED NAME
IN VACUUM LIFTING
EQUIPMENT**

**800.548.7341
WPG.com**

908 West Main - P.O. Box 368
Laurel, Montana 59044 U.S.A.
406.628.8231 (phone)
406.628.8354 (fax)

Wood's Powr-Grip products are sold through authorized dealers.