


**LB11SLB**

**SHORT LIFT BAR  
 OPTION FOR MR16**

This option is designed for applications involving minimal clearance between the lifter and the hoisting equipment, such as installations under eaves or similar low-clearance situations. Interchangeable with standard MR16 lift bar.

Short lift bar option reduces lifter capacity to 1800 lbs [815 kg].

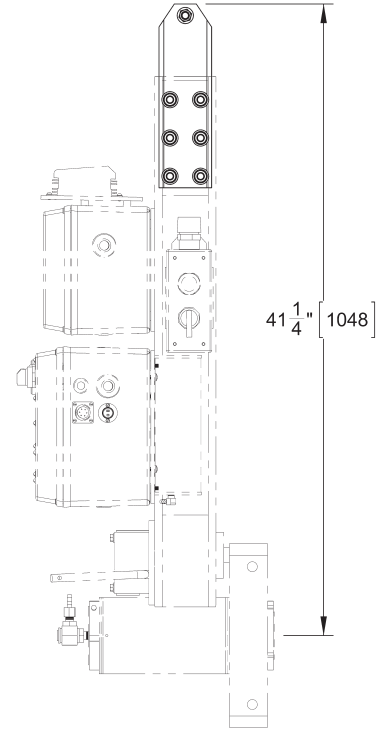

**THE ORIGINAL  
 & TRUSTED NAME  
 IN VACUUM LIFTING  
 EQUIPMENT**

MR1611LDC shown with optional  
 Dual Vacuum System and Short Lift Bar.



908 West Main - P.O. Box 368  
 Laurel, Montana 59044 U.S.A.  
 406.628.8231 (phone)  
 406.628.8354 (fax)

**800.548.7341**  
**www.WPG.com**