
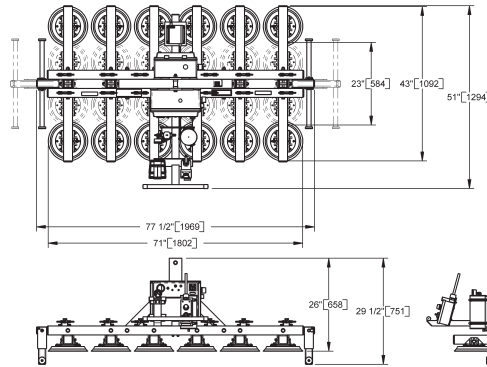


## FLAT LIFTER 3000

This vacuum lifter features an astounding 3000 lbs [1360 kg] capacity, making it the heavy-weight champ in Powr-Grip's® Flat Lifter series for materials handling.

**FL12HV11ACS**  
**3000 lbs [1360 kg]**



Standard Pad Spread	23" x 71" [584 x 1802 mm] (minimum) 43" x 71" [1092 x 1802 mm] (maximum)
Number / Size of Pads	12 / 10" [25 cm] diameter, lipped
Load Capacity (On smooth, nonporous surfaces. Please contact us for recommendations on other surfaces.)	3000 lbs [1360 kg]
Unit Weight	285 lbs [130 kg]
Standard Operating Power	120 volts AC, 60 hertz, 11 amps (Other voltages available)
Apply	4 seconds (approximately)
Release	4 seconds (approximately)
Load Movement	Flat to flat
Standard Features	Movable pad mounts Parking stand / Control handles Twist-lock electrical plug Spring-mounted pads Green lift light Vacuum reserve tank Vacuum line filter Vacuum gauge Blow-off for quick release
Available Options	Vacuum loss warning buzzer (93780BM) Movable control pendant (special order) Individual pad arm shutoffs (93011) Sliding pad mounts (special order) Sliding adjustable pad mounts (special order) Spring-shaft pad mounts (93116) Sliding spring-shaft pad mounts (special order) Sliding adjustable spring-shaft pad mounts (special order) Extensions for movable pad mounts Voltage adaptation (special order) Alternative pad compounds, including ones for low-marking, oil-resistant and temperature resistant applications (special order)
Alternative Power Systems (Specifications may not be as listed above. Please contact us for more information.)	DC power system (FL12HV11DCS) Air (venturi) power system (FL12HV11AIRS)
Design Standards (See www.WPG.com for more information.)	ASME B30.20 - 2006 (BTH-1 Design Category "B", Service Class "0")

**THE ORIGINAL  
 & TRUSTED NAME  
 IN VACUUM LIFTING  
 EQUIPMENT**

908 West Main - P.O. Box 368  
 Laurel, Montana 59044 U.S.A.  
 406.628.8231 (phone)  
 406.628.8354 (fax)

**800.548.7341**  
**www.WPG.com**