

WOOD'S POWR-GRIP® PRODUCTION LINE VERTICAL LIFTERS 500 & 700




VLPL49ACS


500 lbs [225 kg]

VLPL411LACS

700 lbs [320 kg]



Attaching to loads in just seconds, these compact vacuum lifters from Wood's Powr-Grip® provide speed and mobility for transferring production materials between upright processing machinery and storage racks.

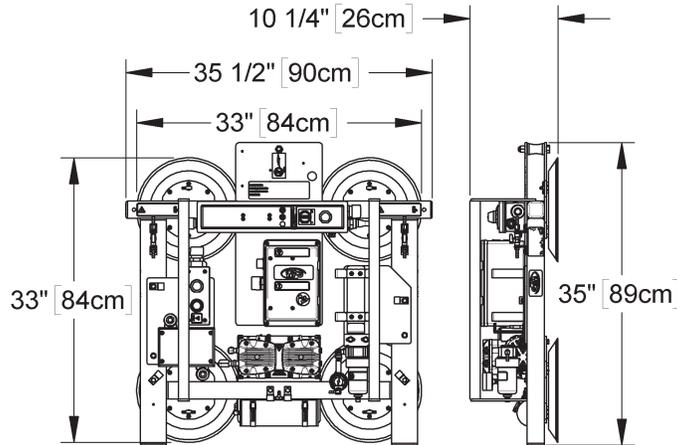

**THE ORIGINAL
& TRUSTED NAME
IN VACUUM LIFTING
EQUIPMENT**

**800.548.7341
WPG.com**

908 West Main - P.O. Box 368
Laurel, Montana 59044 U.S.A.
406.628.8231 (phone)
406.628.8354 (fax)

Wood's Powr-Grip products are sold through authorized dealers.


	VLPL49ACS	VLPL411LACS
Maximum Load Capacity	500 lbs [225 kg]	700 lbs [320 kg]
Standard Operating Power	480 volts AC, 60 hertz, 2 amps 120 volts AC, 60 hertz, 7 amps	
Load Movement	Upright to upright	
Standard Features	Green lift light Individual pad shutoffs to upper pads Twist-lock electrical plug Blow-off for quick release	
Available Options	Air (venturi) power system (VLPL411LAIRS) (Specifications may not be as listed above. Please contact us for more information.) Movable control pendant (special order) Vacuum loss warning buzzer (93780AM) Removable pad arms (special order) Voltage adaptation (special order) Adjustable vertical handles (special order) Alternative pad compounds, including ones for low-marking, temperature resistant and coated surface applications (special order)	
Lifter Weight	105 lb [48 kg]	
Attach	2 seconds (approximately)	3 seconds (approximately)
Release	1 second (approximately)	2 seconds (approximately)
Standard Pad Spread	30" x 30" [76 x 76 mm]	33" x 33" [84 x 84 cm]
Number / Size of Pads	4 / 9" [23 cm] diameter	4 / 11" [28 cm] diameter, lipped
Design Standards	ASME B30.20 (BTH-1 Design Category "B", Service Class "0") (See www.WPG.com for more information.)	

Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.


WOOD'S POWR-GRIP® PRODUCTION LINE VERTICAL LIFTER 1000



VLPL611LACS
1000 lbs [455 kg]



Attaching to loads in just seconds, this compact vacuum lifter from Wood's Powr-Grip® provides speed and mobility for transferring production materials between upright processing machinery and storage racks.

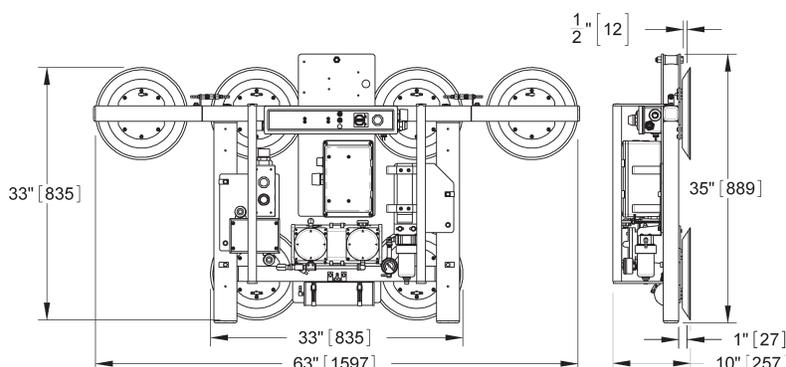

Maximum Load Capacity	1000 lbs [455 kg]
Standard Operating Power	480 volts AC, 60 hertz, 2 amps 120 volts AC, 60 hertz, 7 amps
Load Movement	Upright to upright
Standard Features	Green lift light Removable pad arms Twist-lock electrical plug Blow-off for quick release
Available Options	Air (venturi) power system (VLPL611LAIRS) (Specifications may not be as listed above. Please contact us for more information.) Movable control pendant (special order) Vacuum loss warning buzzer (93780BM) Voltage adaptation (special order) Adjustable vertical handles (special order)
Lifter Weight	135 lbs [62 kg]
Attach	4 seconds (approximately)
Release	3 second (approximately)
Standard Pad Spread	Minimum: 33" x 33" [835 x 835 mm] Maximum: 33" x 63" [835 x 1597 mm]
Number / Size of Pads	6 / 11" [28 cm] diameter, lipped
Design Standards	ASME B30.20 (BTH-1 Design Category "B", Service Class "0") (See www.WPG.com for more information.)

Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.



**THE ORIGINAL
& TRUSTED NAME
IN VACUUM LIFTING
EQUIPMENT**

800.548.7341
WPG.com

908 West Main - P.O. Box 368
Laurel, Montana 59044 U.S.A.
406.628.8231 (phone)
406.628.8354 (fax)

Wood's Powr-Grip products are sold through authorized dealers.